



UniFi / LTE

U-LTE-BACKUP-PRO



Mechanical


Dimensions	66 x 202 x 32 mm (2.6 x 8 x 1.3")
Weight	Without mount: 223 g (7.9 oz) With mount: 336 g (11.9 oz)
Enclosure material	Polycarbonate
Mount material	Stand: aluminum Wall mount: polycarbonate

Hardware

Processor	74 Kc MIPS processor at 775 MHz
Memory	128 MB DDR2
Management interface	Ethernet
Networking interface	(2) GbE RJ45 ports LTE Category 4 radio
SIM	nano-SIM
LTE bands	Bands 1, 3, 7, 8, 20, 28
Power method	PoE+ Passive PoE, 48V
Power Supply	UniFi PoE switch 48V, 0.5A PoE adapter
Supported voltage range	44—57V DC
Max. power consumption	8.5W
Max. TX power	19 dBm
MIMO	2 x 2 LTE Category 4
Throughput speeds	Download 150 Mbps / Upload 50 Mbps * Speed and coverage depend on location and network performance.
LCM display	1.54" screen
Button	Factory reset
Mounting	Wall mount or foot stand (Included)
ESD/EMP protection	Air/Contact: ± 24 kV
Operating temperature	-10 to 60° C (-14 to 140° F)
Operating humidity	5 to 95% noncondensing
Certifications	CE

Software

Management application	UniFi Network: Version 6.5.55 and later
------------------------	---

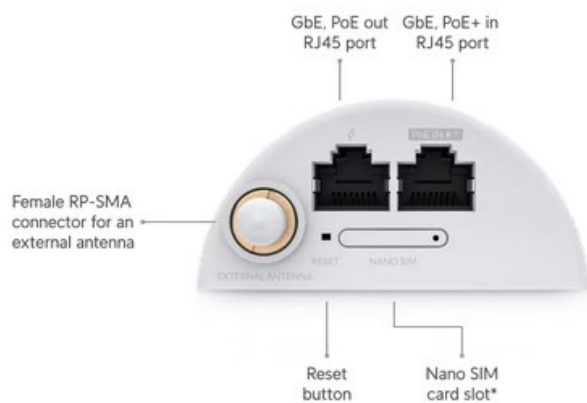

*Third-party SIM card support only available in EU.