




Door Access / Reader Pro UA-G3-PRO

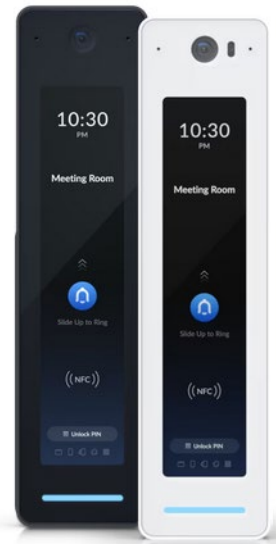

Mechanical

Dimensions 160 x 40.4 x 40.55 mm (6.3 x 1.59 x 1.6")

Weight 136 g (4.8 oz)

Enclosure material Polycarbonate, glass

Mount material Aluminum alloy

Mounting Wall mount (Included)
Gangbox mount (Included)
Angle mount (Optional)
Junction box (Optional)

Weatherproofing IP55

Hardware

Networking interface (1) GbE RJ45 port

Connectivity BLE 4.2
NFC

Power method PoE
UL 294 Power-limited Class 2 PSU
UL 60950-1/62368-1 LPS/PS2 PSU

Supported voltage range 48V DC

Max. power consumption 6W

ESD/EMP protection Air: ±15kV, contact: ±8kV

Sensor Proximity sensor

Camera view angle H: 96.67°, V: 123.15°, D: 153.11°

Microphone Yes

Speaker (1) 4 ohm, 1.5W

LEDs R/G/B/W/Amber [\(Learn more\)](#)

Button (1) Factory-reset

NFC frequency	13.56 MHz
NFC read range	< 30 mm
NFC technology	ISO/IEC 14443A / 14443B / 15693 / 18092 (Ecma 340) MIFARE Classic / MIFARE DESFIRE Sony FeliCa™ (ID only) NFC Forum tags T1T, T2T, T3T, T4T and T5T ECP 2.0
Operating environment	Outdoor use
Ambient operating temperature	Device: -30 to 45° C (-22 to 113° F) Display:* -10 to 45° C (14 to 113° F) *The display will turn off when the ambient temperature is above/below the display operation temperature, but other functions will remain functional. (Effective after firmware v1.3.28)
Ambient operating humidity	5 to 90% noncondensing
Software information	The software version of a product can be checked at https://unifi.ui.com
UL 294 level	Destructive attack: Level I Line security: Level I Endurance: Level I Standby power: Level I
UL 294 statement	Compliance with IEEE 802.3 specifications was not verified as part of UL 294. The equipment is intended to comply with the section of the National Electrical Code, ANSI/NFPA 70, Article 725.121, Power Sources for Class 2 and Class 3 Circuits.
PoE cabling requirements	Cat 5e cabling is the minimum performance category recommended. The performance category utilized should match the transmission speed required at the installation site. The minimal conductor gauge permitted to connect between the PSE or power injector and the PD shall be 26 AWG (0.13 mm ²) for patch cords; 24 AWG (0.21 mm ²) for horizontal or riser cable.
CAN/ULC-60839-11-1 Grade	Grade assignment: I
Certifications	CE, FCC, IC, UL 294, CAN/ULC-60839-11-1
Document number, and issue date and/or revision level	UA-G3-Pro-W/UA-G3-Pro-B, V01
Software	
Management application	UniFi Access: Version 3.0.15 and later

