



Accessories / SFP & Fiber

## SFP Wizard



### ^ Mechanical

#### Dimensions


90.8 x 52.1 x 20.2 mm  
(3.6 x 2.1 x 0.8')

#### Weight

84 g (3 oz)

#### Enclosure Material

Polycarbonate

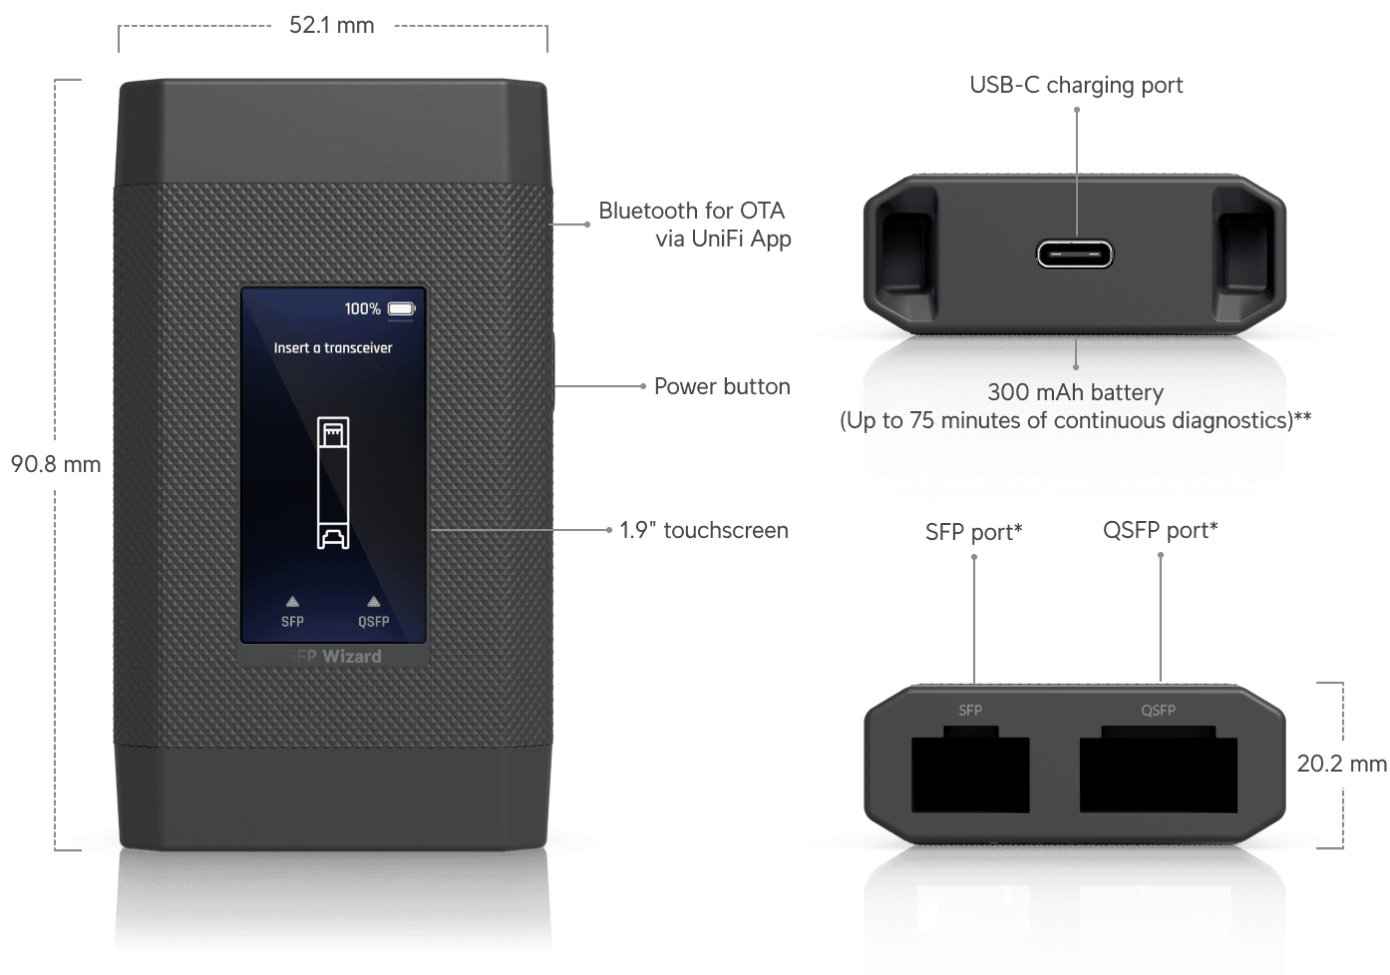

\*Supports SFP, SFP+, SFP28, QSFP+, QSFP28 form factor.

\*\*Supports up to 75 minutes of continuous SFP transceiver diagnostics with laser on, or 35 minutes with QSFP transceivers.

## ^ Hardware

|                               |                                                                                                                |
|-------------------------------|----------------------------------------------------------------------------------------------------------------|
| Networking Interface          | BLE                                                                                                            |
| Power Method                  | Li-ion battery                                                                                                 |
| Battery Life                  | Up to 75 minutes of continuous SFP transceiver diagnostics with laser on, or 35 minutes with QSFP transceivers |
| Power Supply                  | Rechargeable Li-ion battery, 3.7V DC, 300mAh                                                                   |
| Supported Voltage Range       | USB-C: 5V DC/0.5A                                                                                              |
| Max. Power Consumption        | 0.6W                                                                                                           |
| Supported Form Factor         | SFP, SFP+, SFP28, QSFP+, QSFP28                                                                                |
| LCM Display                   | 1.9" touchscreen                                                                                               |
| Buttons                       | (1) Power                                                                                                      |
| Ambient Operating Temperature | 0 to 40° C (32 to 104° F)                                                                                      |
| Ambient Operating Humidity    | 10 to 90% noncondensing                                                                                        |
| NDAA Compliant                | ✓                                                                                                              |
| Certifications                | FCC, IC, CE                                                                                                    |

## ^ Software

### Application Requirements

|            |                                                                                  |
|------------|----------------------------------------------------------------------------------|
| Mobile App | UniFi iOS™ version 10.29.1 and later<br>UniFi Android™ version 10.30.2 and later |
|------------|----------------------------------------------------------------------------------|