



Wi-Fi / Bridging

Device Bridge Switch



^ Overview

Dimensions	212.9 x 113 x 32.5 mm (8.4 x 4.4 x 1.3")
WiFi Standard	WiFi 7
Spatial Streams	4
Mounting Locations	Desktop, wall
Power Method	DC jack (54V DC/1.1A)
Power Supply	54V DC/1.1A (Adapter included)

^ Performance

MIMO

6 GHz	2 x 2
5 GHz	2 x 2

Max. Data Rate

6 GHz	5.8 Gbps (BW320)
5 GHz	4.3 Gbps (BW240)

Antenna Gain

6 GHz	8 dBi
5 GHz	8 dBi

Max. TX Power

6 GHz	23 dBm
5 GHz	26 dBm

Max. Conducted TX Power

26 dBm (Combined)

Supported Data Rates

802.11be (WiFi 7)	6 GHz: 7.3 Mbps to 5.8 Gbps (MCS0 - MCS13 NSS1/2, EHT 20/40/80/160/320) 5 GHz: 7.3 Mbps to 4.3 Gbps (MCS0 - MCS13 NSS1/2, EHT 20/40/80/160/240)
802.11ax (WiFi 6)	7.3 Mbps to 2.4 Gbps (MCS0 - MCS11 NSS1/2, HE 20/40/80/160)
802.11ac (WiFi 5)	6.5 Mbps to 1.7 Gbps (MCS0 - MCS9 NSS1/2, VHT 20/40/80/160)
802.11n	6.5 Mbps to 300 Mbps (MCS0 - MCS15, HT 20/40)
802.11a	6, 9, 12, 18, 24, 36, 48, 54 Mbps

Wireless Security

WPA3 SAE (Always On)

^ Hardware


Max. Power Consumption	25W (Excluding PoE output)
Supported Voltage Range	42.5—57V DC
Networking Interface	(1) 10 GbE RJ45 port (7) 2.5 GbE RJ45 ports
PoE Interface	(8) PoE+ ports
Max. PoE Wattage per Port	30W
Total PoE Availability	60W AC adapter input: 35W 210W AC adapter input: 185W
Antennas	(1) Internal
Management	Ethernet WiFi
Channel Bandwidth	20/40/80/160/240/320 MHz
Weight	Device: 548 g (1.21 lb) With mount: 563 g (1.24 lb)
Enclosure Material	Polycarbonate
Mount Material	Polycarbonate

LCM Display	0.96" status display
Button	(1) Factory-reset
NDAA Compliant	✓
Certifications	CE, FCC, IC
Operating Frequency	Worldwide: 5150—5875 MHz 5945—7125 MHz
Ambient Operating Temperature	-30 to 40° C (-22 to 104° F)
Ambient Operating Humidity	5 to 95% noncondensing

^ Software

Application Requirements

UniFi Network	Version 10.0.156 or later.
---------------	----------------------------

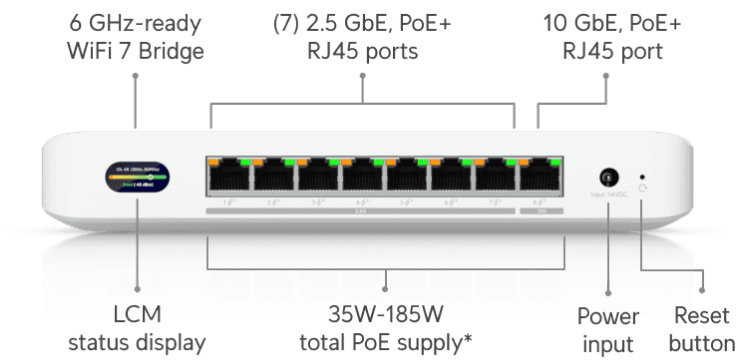

*35W of PoE power with the included 60W adapter, or up to 185W with the optional 210W adapter.