



Integrations / **Network Storage**

UNAS Pro 4



^ Overview

Dimensions	442.4 x 400 x 43.7 mm (17.4 × 15.7 × 1.7")
Storage Capacity	(4) 3.5" drive bays (2) M.2 NVMe bays
Networking Interface	(2) 10G SFP+ (10G only) (1) GbE RJ45 (1G/100M/10M)
Power Redundancy	✓
Form Factor	Rack mount (1U)

^ Hardware

Hard Drive Capacity	(4) 2.5/3.5" HDD / SSD support (2) M.2 NVMe SSD support
Max. Power Budget for Drives	125W
Max. Power Consumption	150W
Power Method	(1) Universal AC input, 100-240V AC, 3A Max., 50/60 Hz (1) USP-RPS DC input, 11.5V DC, 13.91A
Power Supply	AC/DC, internal, 150W
Processor	Quad-Core ARM® Cortex®-A57 at 2.0 GHz
Memory	8 GB
Management	Ethernet
RF Interface	Bluetooth 4.1
Weight	6.7 kg (14.8 lb)
Enclosure Material	SGCC steel
Mount Material	SGCC steel

Supported Rack Depth	The rails support 600 mm (23.6") four-post racks with square holes (9.5 x 9.5 mm) Posts depths ranging from 600–1066 mm (23.6–42")
LEDs	
— Ethernet	✓
— SFP+	✓
— HDD	✓
— RPS	✓
— System	✓
Ambient Operating Temperature	-5 to 40° C (23 to 104° F)
Ambient Operating Humidity	5 to 95% noncondensing
NDAA Compliant	✓
Certifications	FCC, CE, IC

^ Software



Supported File Protocols

NFS	✓
SMB	✓

Supported features on unifi.ui.com

RAID Type		RAID 5 RAID 6 RAID 10
RAID Group		Single
Personal Drive & Shared Drive		✓
SSD Cache		✓
Max. NVMe SSD Capacity Supported		4 TiB
File Encryption		✓
Backup to Remote UNAS		✓
Backup to CIFS/SMB Server		✓
Backup to Cloud Services (Google Drive, OneDrive, Dropbox, Amazon S3, Backblaze B2, Wasabi)		✓
Snapshots		✓

Share Links		✓
Time Machine Backup		✓
Client App Support		✓
User Groups		✓

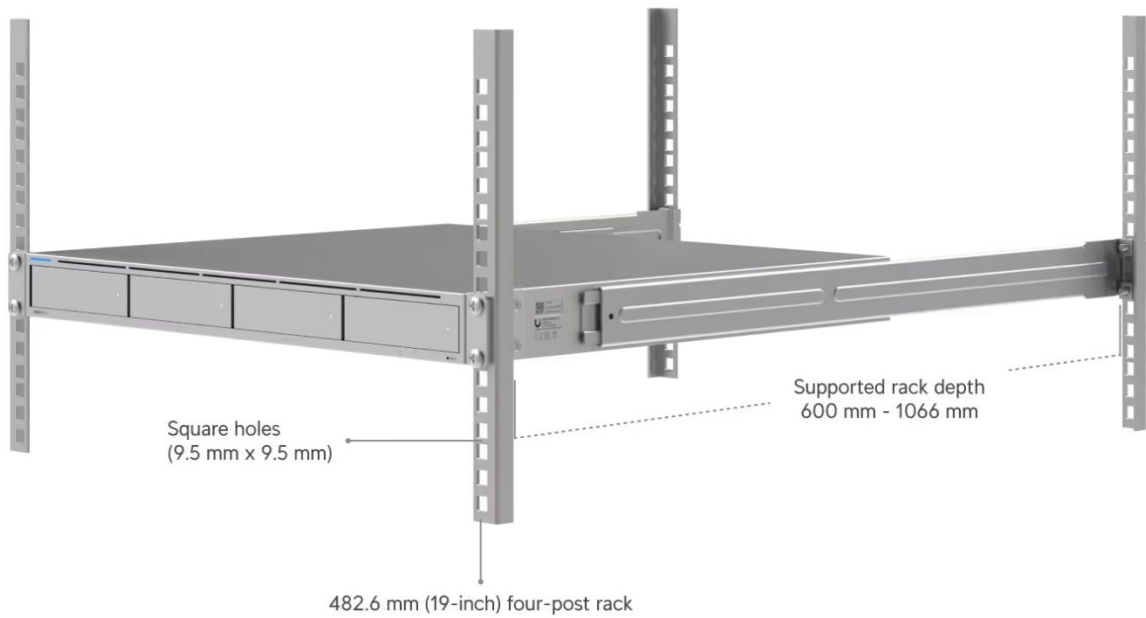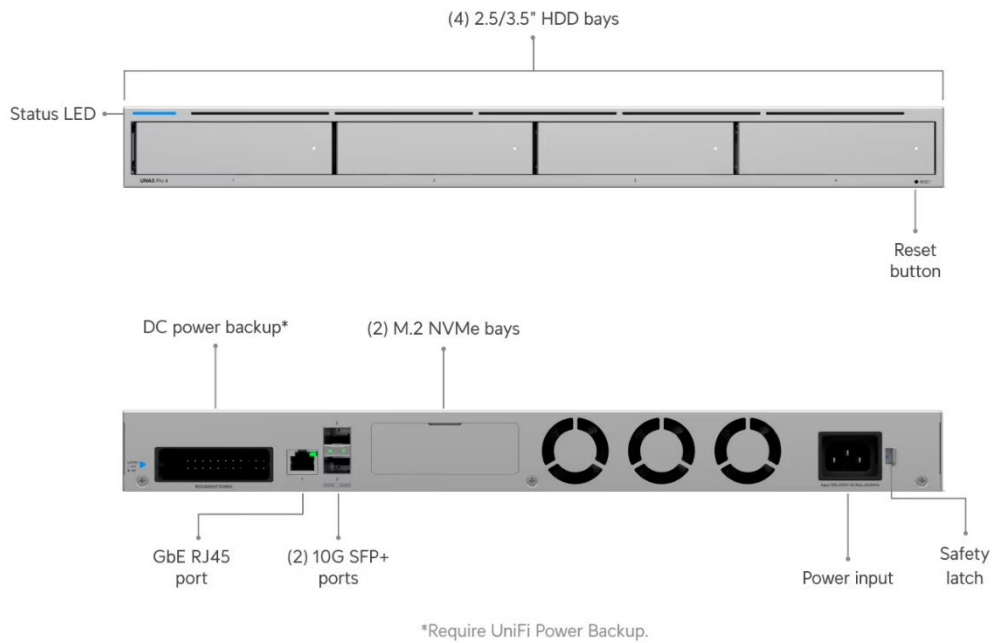

Note: Rack not included.
Product requires a 4-post rack, or a center-mount bracket or cantilever shelf on 2-post racks for optimal support.