



Camera Security / **Special Devices**

AI Port



Mechanical


Dimensions	Without mount: 150 x 64 x 38.4 mm (5.9 x 2.5 x 1.5")
	With mount: 152.7 x 69 x 47.8 mm (6 x 2.7 x 1.9")
Weight	Without mount: 258.3 g (9.1 oz)
	With mount: 294 g (10.4 oz)
Enclosure material	Polycarbonate
Mount material	Polycarbonate
Pole mount diameter	>45 mm (1.8") on pipe outer diameter

Hardware

Networking interface	(1) GbE RJ45 port
Max. camera resolution	Width: 3840 pixels
	Height: 2160 pixels
Power method	PoE
	PoE+ input required for PoE output (12.95W)
	PoE++ input required for PoE+ output (25.5W)
LEDs	Blue/white
Button	Factory-reset
Ambient operating temperature -20 to 40° C (-4 to 104° F)	
Ambient operating humidity	20 to 90% noncondensing
Certifications	FCC, IC, CE

Software

Web application	UniFi Protect: Version 5.1 and later
Mobile app	UniFi Protect iOS™ and Android™

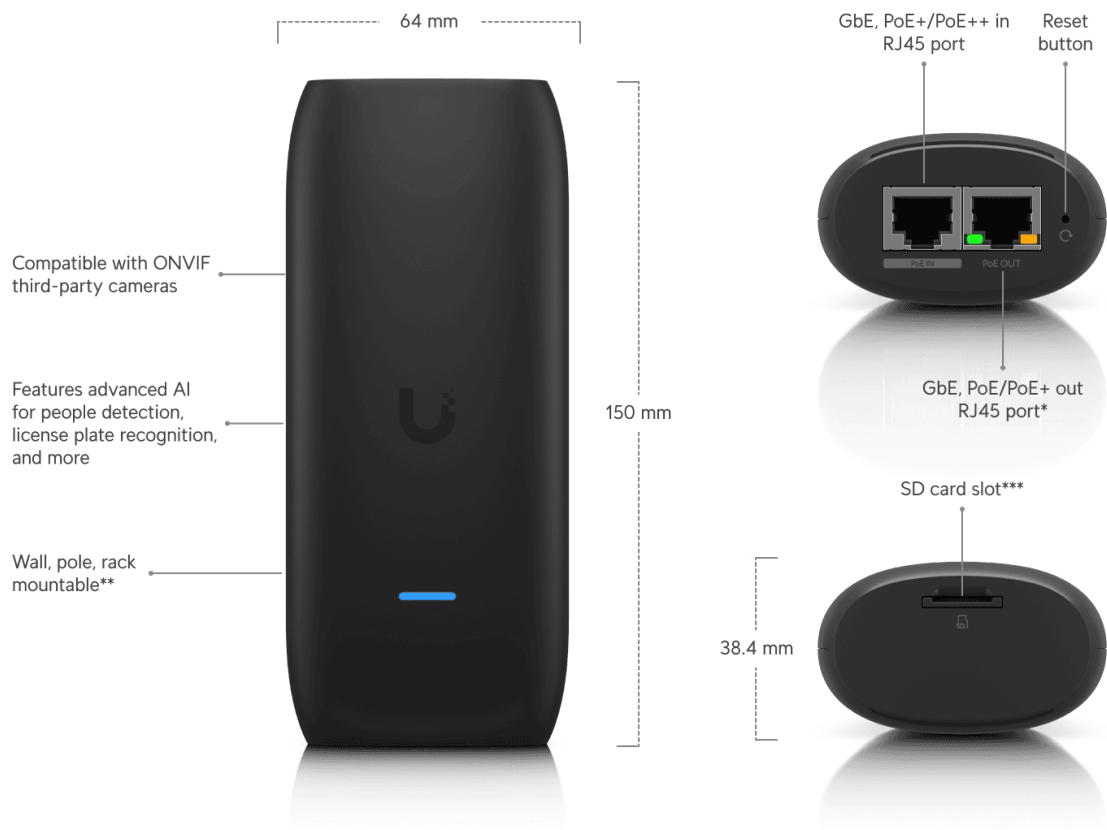

*PoE+ input required for PoE output (12.95W), PoE++ input required for PoE+ output (25.5W).

**Rack mount sold separately.

*** SD card support coming soon.