



UniFi / Switch

USW-ULTRA-210W



Mechanical

Dimensions 203 x 76 x 33 mm (8 x 3 x 1.3")

Weight Device: 320 g (11.3 oz)
Wall mount: 45 g (1.6 oz)
210W adapter: 770 g (1.7 lb)

Enclosure material Polycarbonate

Hardware

Management interface Ethernet In-Band

Networking interface (8) GbE RJ45 ports

PoE interface (7) PoE/PoE+ (Pins 1, 2+; 3, 6-)
(1) PoE++ (Pair A 1, 2+; 3, 6-) (Pair B 4, 5+; 7, 8-)

Total non-blocking throughput 8 Gbps

Switching capacity 16 Gbps

Power method (1) 54V, 3.9A power adapter (Included)
PoE++ (Pins 1, 2+; 3, 6- and 4, 5+; 7, 8-)

Power supply 54V, external, 1.1A/60W

Supported voltage range 44—57V DC

Max. power consumption 9W with PoE input (Excluding PoE output)
8W with AC adapter input (Excluding PoE output)

PoE++ input: 42W
PoE+ input: 16W
60W PoE adapter input: 42W
60W AC adapter input: 52W
210W AC adapter input: 202W*
*At 45° C (113° F) operating temperature. Reduced to 161W (230V) or 121W (115V) at 60° C (140° F)

Max. PoE+ wattage per port by PSE 30W

Button Factory reset

Operating temperature PoE++ input: -30 to 60° C (-22 to 140° F)
60W AC adapter input: -20 to 45° C (-4 to 113° F)
210W AC adapter input: -20 to 60° C (-4 to 140° F)

Operating humidity 10 to 90% noncondensing

Certifications CE, FCC, IC


LEDs

System Status

Ethernet PoE
Link/activity

Application Requirements

UniFi Network Version 8.0.7 and later

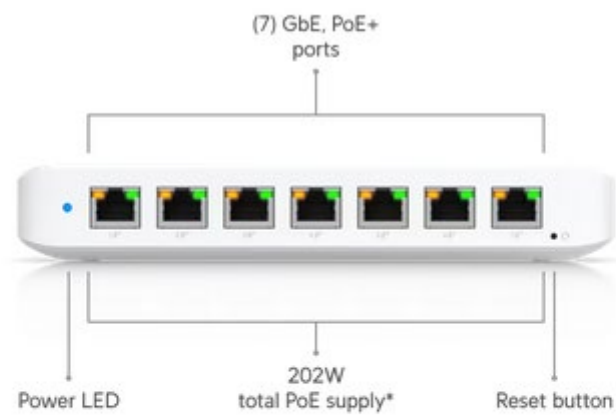

* With the included AC power adapter.